


COMMON MODE EMI SUPPRESSION INDUCTORS




- Low profile or vertical mounting available
- Windings balanced within one percent
- For use in switching power supply input filter circuits
- Dielectric strength 1250V_{RMS}
- Designed with 3.0mm minimum creep distance between windings

Vertical Package

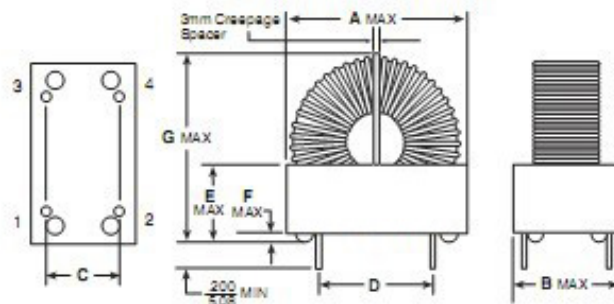

Package Number	A	B	C	D	E	F	G
1	1.15 29,21	.560 14,22	.400 10,15	.800 20,32	.45 11,43	.015 0,38	1.15 29,21
2	1.44 36,57	.800 20,32	.600 15,24	.900 22,86	.70 17,78	.030 0,76	1.50 38,10

Low Profile Package

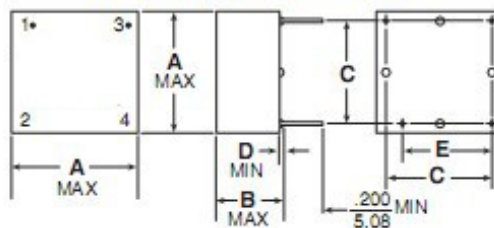

Package Number	A	B	C	D	E
1	1.25 31,75	.600 15,24	1.00 25,40	.015 0,38	.900 22,86
2	1.50 38,10	.800 20,32	1.28 32,51	.010 0,25	1.083 27,50

Schematic



Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$