


## CURRENT COMPENSATED NOISE SUPPRESSION CHOKES

### S-2X Series-2 Phase Common Mode Choke


- Complies with VDE 565-2
- Materials meet UL-94V0 requirements
- Rated voltage: 250 Vac
- Withstanding voltage: 1500 Vac

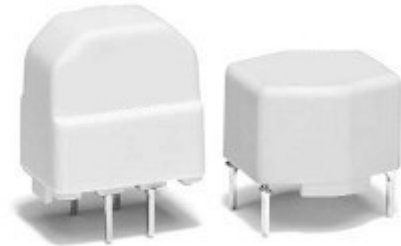


### Schematics

---

**Style 2 - Vertical Package**




**Style 3 - Horizontal Package**



## Mechanicals


Style 2 - Vertical Package

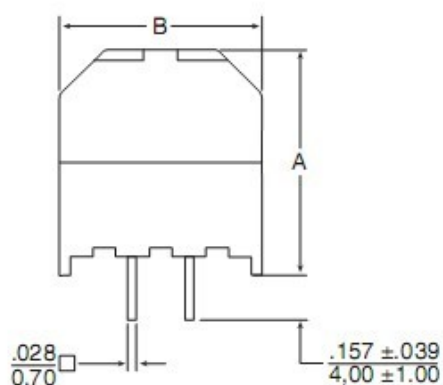

PINS VIEW

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Style 3 - Horizontal Package

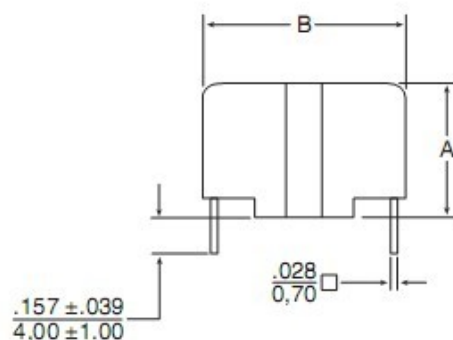

PINS VIEW

Size Code	A MAX	B MAX	C MAX	E	F
3	.803 20,40	.724 18,40	.528 13,40	.394 10,00	.197 5,00
4	1.000 25,40	.921 23,40	.626 15,90	.492 12,50	.394 10,00
5	1.197 30,40	1.079 27,40	.724 18,40	.591 15,00	.492 12,50
6	1.394 35,40	1.276 32,40	.724 18,40	.591 15,00	.492 12,50

NOTE: Tolerances for E & F are ±.010 / 0,25

Size Code	A MAX	B MAX	C MAX	D	E
3	.508 12,90	.705 17,90	.705 17,90	.394 10,00	.591 15,00
4	.606 15,40	.902 22,90	.902 22,90	.492 12,50	.787 20,00
5	.705 17,90	1.098 27,90	1.098 27,90	.591 15,00	.984 25,00
8	1.000 25,40	1.709 43,40	1.669 42,40	.591 15,00	1.575 40,00

NOTE: Tolerances for D & E are ±.010 / 0,25