


## THROUGH HOLE CURRENT SENSE TRANSFORMERS

VDE Approved


- Meets IEC950 insulation requirements
- 3750V<sub>RMS</sub> primary to secondary breakdown voltage
- Frequency range 10kHz to 200kHz



### Mechanical

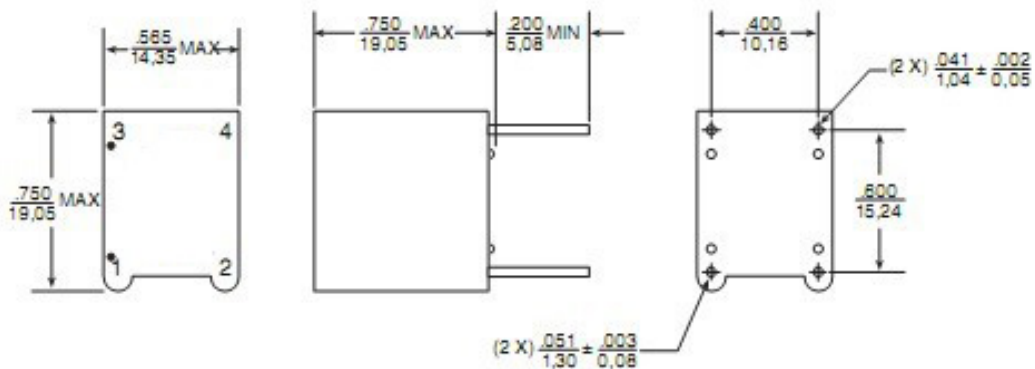

### Schematic

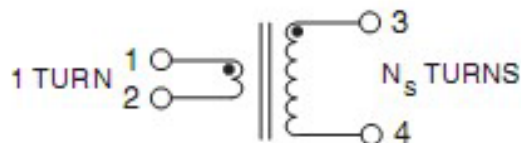

Parts per package.....80

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are  $\pm \frac{.005}{0,13}$